

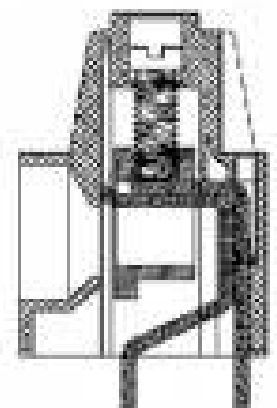


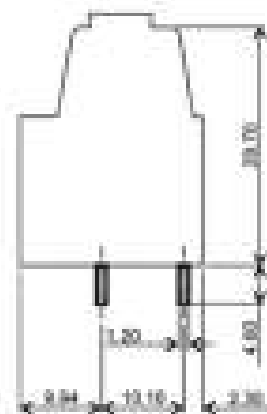

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Series 1016

Screw Type (Cage-Clamp Design) Connectors

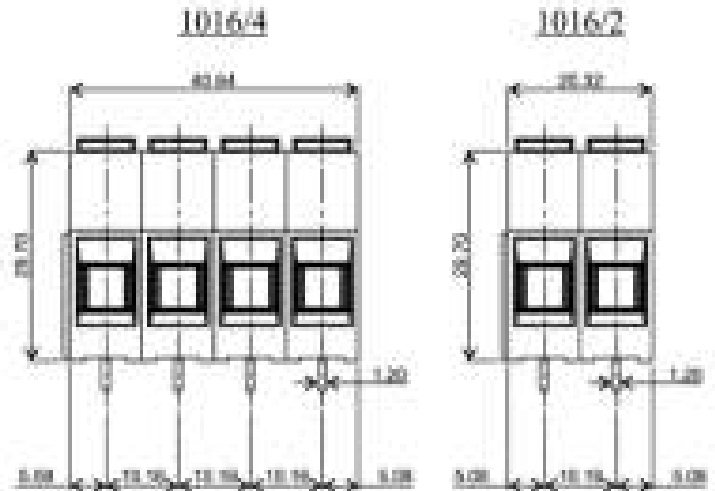

TECHNICAL SPECIFICATIONS :

Pitch	: 10.16 mm
Nominal Rating	: 65A/1000V
Dielectric Strength	: > 2kV
Moulded Material	: PA66 - UL94 V0 or V2
Insulation Resistance	: > 1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy
Wire Cage	: Brass Nickel Plated
Screw	: M4 X 0.70 mm
	: MS Trivalent Zinc Plated Suffix "C"
Wire Size	: 12 mm ²
Maximum Torque	: 1.0-1.1 Nm

Approval Data

- UL : Refer UL file E247792
- cUL : Refer UL file E247792
- CE : 65A/1000V

ORDERING CODE



Number of Poles: Single way with interlocking
Grade : P or C

- P = Professional Grade
- C = Economy Grade

Note : PCB-hole diameter is 2.10 mm